

PASSIVE HDCVI TRANSCEIVER SINGLE CHANNEL

Features:

Compatible with AHD/CVI/TVI signal

Transmission signal: 720P/1080P

Cable: CAT 5/5e/6

Transmission distance to 300M for CVI/AHD, 200M for TVI

No power required

Built-in surge & transient protection


Super interference rejection

Specifications:

	ITEM	SPECIFICATION
Physical Properties	Dimension (L*W*H)	13.7mm*11.6mm*3mm
	Shell	ABS
	Color	Black
	N. W.	60g
Stability	MTBF	>10000H
Environmental	Operating Temperature	-10-55°C
	Storage Temperature	-20-70°C
	Humidity	0-95% (non-condensing)

Specifications:

	ITEM	SPECIFICATION
Properties	Transmission signal	1 channel
	Transmission distance	AHD/CVI:300m (max) TVI:200m (max)
	Category Type	UTP CAT5/5E/6
Video transmission properties and port	Coaxial video connector	BNC-M
	Twisted-pair video connector	Push-terminal
	Compatible Format	AHD / HDCVI / HDTV
	Resolution	720P/1080P
	Anti-interference	>60dB
Protection	ESD	1a contact discharge electricity level 3
		1b air discharge electricity level 3
		Per: IEC61000-4-2
Impedance	Coaxial cable connector	2KV(common-code) Per: IEC1000-4-5
	UTP Cable Connector	2KV(different-code), 4KV(common-code), Per: IEC1000-4-5
Impedance	BNC male	75 Ohms
	UTP cable	100 Ohms

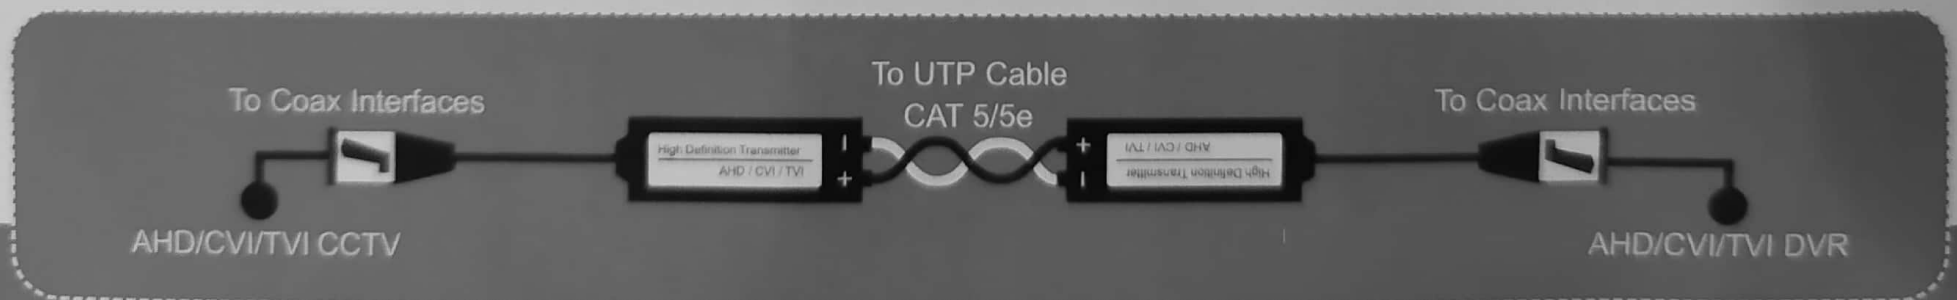

Made In China